

MENNEKES CEE plugs and connectors PowerTOP plus for use under harsh conditions


with highly heat-resistant contact carrier and nickel-plated contacts

to DIN VDE 0623, EN 60309-2, colour: grey and/or colour code. Enclosure and insert made of **AMAPLAST**.
Other voltages and frequencies available on request.

3 4 5 2p+E 3p+E 3p+N+E			Ampere	Poles	110V 50 a. 60Hz	230V 50 a. 60Hz	400V 50 a. 60Hz	500V 50 a. 60Hz										
					3p 4h	4p 4h	5p 4h	3p 6h	4p 9h	5p 9h	3p 9h	4p 6h	5p 6h	3p 7h	4p 7h	5p 7h		
	Plug PowerTOP plus		63	3	3210	3212	3249	3252 3258	3255									
			63	4														
			63	5														
	⚠ IP 44 Product group 2219, type 3258 shown																	
	Plug PowerTOP plus		63	3	3301	3303	3305	3308 3325	3323									
			63	4						125	3	3358	3374* 3381*	3377*				
			63	5														
			125	3														
			125	4														
			125	5														
	Connector PowerTOP plus with SoftCONTACT		63	3	3270	3272	3273	3275 3285	3277									
			63	4														
			63	5														
	⚠ IP 44 Product group 3219, type 3285 shown		Products with pilot contact: Part number + index P															
	Connector PowerTOP plus 63A: with SoftCONTACT 125A: with TorsionSpringCONTACT		63	3	3401	3403	3405	3408 3425	3423									
			63	4						125	3	3457*	3469* 3480*	3472*				
			63	5														
			125	3														
			125	4														
			125	5														
⚠ IP 67 Product group 3220, type 3425 shown		Products with pilot contact: Part number + index P																


*Until the PowerTOP plus are available for 125A, the reliable PowerTOP plugs and connectors are delivered with external strain relief.

Highly heat-resistant contact carrier, frame terminals, nickel-plated contacts, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides




Drawing 2 MB 228	Amp. Poles	63		
		3	4	5
Dim. in mm	a	250	250	250
	Øb	90	90	90
	Øy [max]	36	36	36
Terminal for cond. cross		6	6	6
section (mm²) min.-max.		—16	—16	—16

Highly heat-resistant contact carrier, frame terminals, nickel-plated contacts, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides

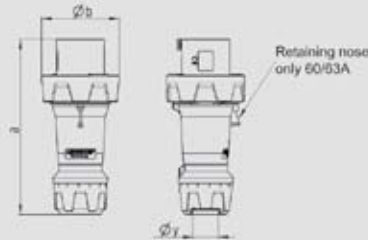


Drawing 2 MB 227	Amp. Poles	63			125		
		3	4	5	3	4	5
Dim. in mm	a	250	250	250	290	290	290
	Øb	111	111	111	128	128	128
	Øy [max]	36	36	36	49	49	49
Terminal for cond. cross		6	6	6	25	25	25
section (mm²) min.-max.		—16	—16	—16	—50	—50	—50

Highly heat-resistant contact carrier, frame terminals, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides



Drawing 3 MB 71	Amp. Poles	63		
		3	4	5
Dim. in mm	a	268	268	268
	Øb	95	95	95
	h	109	109	109
	Øy [max]	36	36	36
Terminal for cond. cross		6	6	6
section (mm²) min.-max.		—16	—16	—16

Highly heat-resistant contact carrier, frame terminals, cable gland with integrated strain relief, seal and protection against kinking, enclosure with thread lock, two safety slides

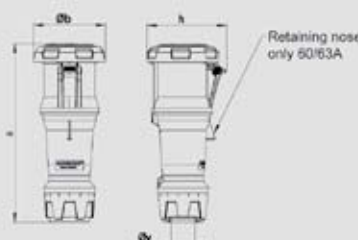

Drawing 3 MB 70	Amp. Poles	63			125		
		3	4	5	3	4	5
Dim. in mm	a	270	270	270	310	310	310
	Øb	109	109	109	121	121	121
	h	121	121	121	133	133	133
	Øy [max]	36	36	36	49	49	49
Terminal for cond. cross		6	6	6	25	25	25
section (mm²) min.-max.		—16	—16	—16	—50	—50	—50